

**ROADX**  
**TIRE**

---

ROADX HEADQUARTERS  
NO.43 Zhengzhou Rd, Qingdao, China

**ROADX**  
**TIRE**

## TRACTOR TRAILER TIRE CATALOG



REGIONAL

ST350

RH631



The RoadX ST350 is a steer and trailer position tire.

TIRE FEATURES:

- 4-layer belt construction increases durability and driving comfort.
- Wide running surface, widened tread shoulder, and closed shoulder design promote even wear and improve wear resistance.
- Groove nodules effectively reduce stone retention.



The RoadX RH631 is a steer and trailer position tire.

TIRE FEATURES:

- The column at the bottom of the groove improves the tire's self-cleaning ability and prevents groove cracking.
- Four layer belt design promotes even ground distribution for longer mileage.
- Optimized groove design improves safety and handling performance.
- New low-heat build up and high wear resistance compound effectively improves tire life.
- Optimized contour design and tread compound balance stress distribution inside the tire to improve service life.



|    | Size    | Standard Rim(inch) | PR | Load |      |      |      | Pressure |     |     |     | Load Index |     | Tread Depth (mm) | Speed Grade | Inflated Tire Dimenton(mm) |     |
|----|---------|--------------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|----------------------------|-----|
|    |         |                    |    | Kg   |      | Lbs  |      | Kpa      |     | Psi |     |            |     |                  |             | D                          | B   |
|    |         |                    |    | S    | D    | S    | D    | S        | D   | S   | D   | S          | D   |                  |             | D                          | B   |
| CN | 12R22.5 | 9.00               | 18 | 3550 | 3250 | 7830 | 7160 | 930      | 930 | 135 | 135 | 152        | 149 | 16.5             | L           | 1085                       | 300 |

|    | Size    | Standard Rim(inch) | PR | Load |      |      |      | Pressure |     |     |     | Load Index |     | Tread Depth (mm) | Speed Grade | Inflated Tire Dimention(mm) |     |
|----|---------|--------------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|-----------------------------|-----|
|    |         |                    |    | Kg   |      | Lbs  |      | Kpa      |     | Psi |     |            |     |                  |             |                             |     |
|    |         |                    |    | S    | D    | S    | D    | S        | D   | S   | D   | S          | D   |                  |             | S                           | D   |
| CN | 12R22.5 | 9                  | 18 | 3550 | 3250 | 7830 | 7160 | 930      | 930 | 135 | 135 | 152        | 149 | 15               | L           | 1085                        | 300 |

REGIONAL


RH621



The RoadX RH621 is a steer and trailer position tire.

TIRE FEATURES:

- Groove and sipe design improve tire grip.
- The widened running surface improves pressure distribution for better traction.
- Groove nodules improve handling and driving comfort.
- The widened shoulders and shallow groove design effectively dissipate heat to promote even shoulder wear.

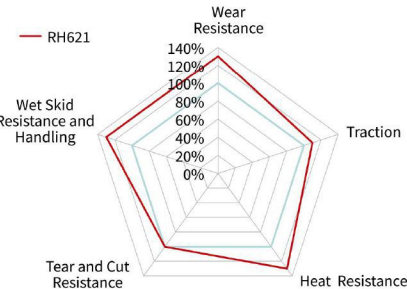

|    | Size    | Standard Rim(inch) | PR | Load |      |      |      | Pressure |     |     |     | Load Index |     | Tread Depth (mm) | Speed Grade | Inflated Tire Dimension(mm) |     |
|----|---------|--------------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|-----------------------------|-----|
|    |         |                    |    | Kg   |      | Lbs  |      | Kpa      |     | Psi |     |            |     |                  |             | D                           | B   |
|    |         |                    |    | S    | D    | S    | D    | S        | D   | S   | D   |            |     |                  |             |                             |     |
| CN | 11R22.5 | 8.25               | 16 | 3150 | 2900 | 6940 | 6395 | 850      | 850 | 123 | 123 | 148        | 145 | 15               | M           | 1054                        | 279 |
| CN | 12R22.5 | 9.00               | 18 | 3550 | 3250 | 7830 | 7160 | 930      | 930 | 135 | 135 | 152        | 149 | 16               | L           | 1085                        | 300 |

REGIONAL

RH632A

RH648R<sup>3</sup>



The RoadX RH632A is a steer and trailer position tire.

TIRE FEATURES:

- Variable pitch tread design reduces noise emissions.
- Optimized contour design and widened tread improve wear resistance and effective mileage.
- Shoulder notches and sipes better dissipate heat when running at high speeds.
- A jagged and staggered groove design effectively reduces stone retention.



|    | Size     | Standard Rim(inch) | PR | Load |      |      |      | Pressure |     |     |     | Load Index |     | Tread Depth (mm) | Speed Grade | Inflated Tire Dimension(mm) |     |
|----|----------|--------------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|-----------------------------|-----|
|    |          |                    |    | Kg   |      | Lbs  |      | Kpa      |     | Psi |     |            |     |                  |             | S                           | D   |
|    |          |                    |    | S    | D    | S    | D    | S        | D   | S   | D   |            |     |                  |             |                             |     |
| CN | 11.00R20 | 8.0                | 16 | 3350 | 3075 | 7390 | 6780 | 830      | 830 | 120 | 120 | 150        | 147 | 14.5             | K           | 1085                        | 293 |
| CN | 11.00R20 | 8.0                | 18 | 3550 | 3250 | 7830 | 7160 | 930      | 930 | 135 | 135 | 152        | 149 | 14.5             | K           | 1085                        | 293 |



The Road RH648R3 is a steer and trailer position tire.

TIRE FEATURES:

- Broad 4 rib design delivers precise handling performance.
- Wide main grooves efficiently expel water for improved traction on wet roads.
- Rubber nodules at the groove bottom reduce stone retention.



|       | Size        | Standard Rim(inch) | PR | Load |      |      |      | Pressure |     |     |     | Load Index |     | Tread Depth (mm) | Speed Grade | Inflated Tire Dimension(mm) |     |
|-------|-------------|--------------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|-----------------------------|-----|
|       |             |                    |    | Kg   |      | Lbs  |      | Kpa      |     | Psi |     |            |     |                  |             | D                           | B   |
|       |             |                    |    | S    | D    | S    | D    | S        | D   | S   | D   | S          | D   |                  |             |                             |     |
| CN/VN | 11R22.5     | 8.25               | 14 | 2800 | 2650 | 6175 | 5840 | 720      | 720 | 105 | 105 | 144        | 142 | 14.5             | M           | 1054                        | 279 |
| CN/VN | 11R22.5     | 8.25               | 16 | 3000 | 2725 | 6610 | 6005 | 830      | 830 | 120 | 120 | 146        | 143 | 14.5             | M           | 1054                        | 279 |
| CN/VN | 295/75R22.5 | 9.00               | 14 | 2800 | 2575 | 6175 | 5675 | 760      | 760 | 110 | 110 | 144        | 141 | 14.5             | M           | 1014                        | 298 |
| CN/VN | 295/75R22.5 | 9.00               | 16 | 3000 | 2725 | 6610 | 6005 | 830      | 830 | 120 | 120 | 146        | 143 | 14.5             | M           | 1014                        | 298 |

REGIONAL

RD782


RD794



The RoadX RD782 is a drive position tire.

TIRE FEATURES:

- Shoulder blocks are connected with a rib design to improve tear resistance and promote even wear.
- Open shoulder and tread block design improve traction and heat dissipation.
- Optimized tread profile and widened tread improve service life.

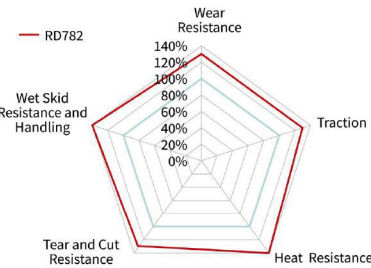

|    | Size    | Standard Rim(inch) | PR | Load |      |      |      | Pressure |     |     |     | Load Index |     | Tread Depth (mm) | Speed Grade | Inflated Tire Dimension(mm) |     |
|----|---------|--------------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|-----------------------------|-----|
|    |         |                    |    | Kg   |      | Lbs  |      | Kpa      |     | Psi |     |            |     |                  |             |                             |     |
|    |         |                    |    | S    | D    | S    | D    | S        | D   | S   | D   | S          | D   |                  |             |                             |     |
| CN | 11R22.5 | 8.25               | 16 | 3000 | 2725 | 6610 | 6005 | 830      | 830 | 120 | 120 | 146        | 143 | 21.5             | L           | 1065                        | 279 |
| CN | 11R22.5 | 8.25               | 16 | 3150 | 2900 | 6940 | 6395 | 850      | 850 | 123 | 123 | 148        | 145 | 21               | L           | 1065                        | 279 |
| CN | 12R22.5 | 9.00               | 18 | 3550 | 3250 | 7830 | 7160 | 930      | 930 | 135 | 135 | 152        | 149 | 22.5             | K           | 1096                        | 300 |



The RoadX RD794 is a drive position tire.

TIRE FEATURES:

- The horizontal grooves are designed to offer exceptional grip and traction.
- Open shoulder design effectively reduces heat buildup.



|    | Size     | Standard Rim(inch) | PR | Load |      |      |      | Pressure |     |     |     | Load Index |     | Tread Depth (mm) | Speed Grade | Inflated Tire Dimension(mm) |     |
|----|----------|--------------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|-----------------------------|-----|
|    |          |                    |    | Kg   |      | Lbs  |      | Kpa      |     | Psi |     |            |     |                  |             | S                           | D   |
|    |          |                    |    | S    | D    | S    | D    | S        | D   | S   | D   |            |     |                  |             |                             |     |
| VN | 11.00R20 | 8.0                | 18 | 3550 | 3250 | 7830 | 7160 | 930      | 930 | 135 | 135 | 152        | 149 | 17.5             | K           | 1085                        | 293 |
| VN | 11R22.5  | 8.25               | 18 | 3250 | 3000 | 7160 | 6610 | 930      | 930 | 135 | 135 | 149        | 146 | 21.5             | K           | 1065                        | 279 |

REGIONAL

RD796



The RoadX RD796 is a drive position tire.

TIRE FEATURES:

- Aggressive, open-shoulder tread improves self cleaning capabilities for exceptional traction in mud and snow.
- Staggered tread blocks evenly distribute pressure to promote even wear.
- Deep 25/32" tread depth improves service life.



|       | Size    | Standard Rim(inch) | PR | Load |      |      |      | Pressure |     |     |     | Load Index |     | Tread Depth (mm) | Speed Grade | Inflated Tire Dimenton(mm) |     |
|-------|---------|--------------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|----------------------------|-----|
|       |         |                    |    | Kg   |      | Lbs  |      | Kpa      |     | Psi |     |            |     |                  |             |                            |     |
|       |         |                    |    | S    | D    | S    | D    | S        | D   | S   | D   | S          | D   |                  |             | S                          | D   |
| CN/VN | 11R22.5 | 8.25               | 16 | 3000 | 2725 | 6610 | 6005 | 830      | 830 | 120 | 120 | 146        | 143 | 20               | L           | 1054                       | 279 |

REGIONAL

AP856

AP865



The RoadX AP856 is an all-position tire

TIRE FEATURES:

- Shoulder grooves and sipes improve heat dissipation, reduce shoulder rigidity, and promote even wear.
- Unique tread and shoulder groove designs improve grip and traction.
- Main grooves improve directional driving stability and promote even wear.
- Wear-resistant tread compound improves mileage.



The RoadX AP865 is an all-position tire.

TIRE FEATURES:

- Shoulder grooves improve heat dissipation to promote even wear.
- Small block sipes help to evenly distribute contact pressure for better grip.
- Ultra-wide running surface, shoulder design, and tread compound improve wear resistance.
- Groove nodules reduce stone retention.



|       | Size     | Standard Rim(inch) | PR | Load |      |      |      | Pressure |     |     |     | Load Index |     | Tread Depth (mm) | Speed Grade | Inflated Tire Dimension(mm) |     |
|-------|----------|--------------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|-----------------------------|-----|
|       |          |                    |    | Kg   |      | Lbs  |      | Kpa      |     | Psi |     |            |     |                  |             |                             |     |
|       |          |                    |    | S    | D    | S    | D    | S        | D   | S   | D   | S          | D   |                  |             |                             |     |
| CN/VN | 11.00R20 | 8.0                | 18 | 3550 | 3250 | 7830 | 7160 | 930      | 930 | 135 | 135 | 152        | 149 | 15.5             | K           | 1085                        | 293 |
| CN    | 11R22.5  | 8.25               | 16 | 3000 | 2725 | 6610 | 6005 | 830      | 830 | 120 | 120 | 146        | 143 | 16               | L           | 1054                        | 279 |
| CN    | 12R22.5  | 9.00               | 18 | 3550 | 3250 | 7830 | 7160 | 930      | 930 | 135 | 135 | 152        | 149 | 18               | K           | 1085                        | 300 |

|       | Size    | Standard Rim(inch) | PR | Load |      |      |      | Pressure |     |     |     | Load Index |     | Tread Depth (mm) | Speed Grade | Inflated Tire Dimenton(mm) |     |
|-------|---------|--------------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|----------------------------|-----|
|       |         |                    |    | Kg   |      | Lbs  |      | Kpa      |     | Psi |     |            |     |                  |             |                            |     |
|       |         |                    |    | S    | D    | S    | D    | S        | D   | S   | D   | S          | D   |                  |             |                            |     |
| CN    | 11R22.5 | 8.25               | 16 | 3150 | 2900 | 6940 | 6395 | 850      | 850 | 123 | 123 | 148        | 145 | 16               | M           | 1059                       | 279 |
| CN/VN | 12R22.5 | 9.00               | 18 | 3550 | 3250 | 7825 | 7165 | 930      | 930 | 135 | 135 | 152        | 149 | 18               | K           | 1085                       | 300 |

REGIONAL

AP866

AP863



The RoadX AP866 is an all-position tire.

TIRE FEATURES:

- Large, deep shoulder grooves increase off-road traction.
- Unique tread grooves improve grip and traction as well as directional stability.
- Tread design promotes even tread wear.
- Widened running surface and specialized tread compound improve puncture and abrasion resistance.



|    | Size     | Standard Rim(inch) | PR | Load |      |      |      | Pressure |     |     |     | Load Index |     | Tread Depth (mm) | Speed Grade | Inflated Tire Dimension(mm) |     |
|----|----------|--------------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|-----------------------------|-----|
|    |          |                    |    | Kg   |      | Lbs  |      | Kpa      |     | Psi |     |            |     |                  |             |                             |     |
|    |          |                    |    | S    | D    | S    | D    | S        | D   | S   | D   | S          | D   |                  |             | S                           | D   |
| CN | 11.00R20 | 8                  | 16 | 3350 | 3075 | 7390 | 6780 | 830      | 830 | 120 | 120 | 150        | 147 | 16.5             | K           | 1085                        | 293 |
| CN | 11.00R20 | 8.0                | 18 | 3550 | 3250 | 7830 | 7160 | 930      | 930 | 135 | 135 | 152        | 149 | 16.5             | K           | 1085                        | 293 |
| CN | 12.00R20 | 8.5                | 18 | 3750 | 3450 | 8270 | 7610 | 830      | 830 | 120 | 120 | 154        | 151 | 17               | K           | 1125                        | 315 |



The RoadX AP863 is an all-position tire designed only fit for tractor and trailer.

TIRE FEATURES:

- Specialized groove design improves directional stability and skid resistance for various applications.
- Tread design and groove nodules reduce stone retention.
- Shoulder grooves improve heat dissipation.
- Fine tread grooves improve driving safety on wet roads.



|    | Size    | Standard Rim(inch) | PR | Load |      |      |      | Pressure |     |     |     | Load Index |     | Tread Depth (mm) | Speed Grade | Inflated Tire Dimenton(mm) |     |
|----|---------|--------------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|----------------------------|-----|
|    |         |                    |    | Kg   |      | Lbs  |      | Kpa      |     | Psi |     |            |     |                  |             |                            |     |
|    |         |                    |    | S    | D    | S    | D    | S        | D   | S   | D   | S          | D   |                  |             | S                          | D   |
| CN | 12R22.5 | 9.00               | 20 | 3550 | 3250 | 7830 | 7160 | 930      | 930 | 135 | 135 | 152        | 149 | 18.5             | K           | 1085                       | 300 |

REGIONAL

# AP866A

# AP868



The RoadX AP866A is an all-position tire.

TIRE FEATURES:

- Large, deep shoulder grooves increase off-road traction.
- Unique tread grooves improve grip and traction as well as directional stability.
- Tread design promotes even tread wear.
- Widened running surface and specialized tread compound improve puncture and abrasion resistance.



|       | Size     | Standard Rim(inch) | PR | Load |      |      |      | Pressure |     |     |     | Load Index |     | Tread Depth (mm) | Speed Grade | Inflated Tire Dimension(mm) |     |
|-------|----------|--------------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|-----------------------------|-----|
|       |          |                    |    | Kg   |      | Lbs  |      | Kpa      |     | Psi |     |            |     |                  |             |                             |     |
|       |          |                    |    | S    | D    | S    | D    | S        | D   | S   | D   | S          | D   |                  |             |                             |     |
| CN/VN | 11.00R20 | 8.0                | 18 | 3550 | 3250 | 7830 | 7160 | 930      | 930 | 135 | 135 | 152        | 149 | 16.5             | K           | 1085                        | 293 |
| CN/VN | 12.00R20 | 8.5                | 18 | 3750 | 3450 | 8270 | 7610 | 830      | 830 | 120 | 120 | 154        | 151 | 17               | K           | 1125                        | 315 |



The RoadX AP868 is an all-position tire.

TIRE FEATURES:

- Wide tread and solid shoulder ribs deliver exceptional stability and promote even wear.
- Deep tread improves service life and traction.



|       | Size    | Standard Rim(inch) | PR | Load |      |      |      | Pressure |     |     |     | Load Index |     | Tread Depth (mm) | Speed Grade | Inflated Tire Dimenton(mm) |     |
|-------|---------|--------------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|----------------------------|-----|
|       |         |                    |    | Kg   |      | Lbs  |      | Kpa      |     | Psi |     |            |     |                  |             |                            |     |
|       |         |                    |    | S    | D    | S    | D    | S        | D   | S   | D   | S          | D   |                  |             | S                          | D   |
| CN/VN | 11R22.5 | 8.25               | 16 | 3000 | 2725 | 6610 | 6005 | 830      | 830 | 120 | 120 | 146        | 143 | 18               | K           | 1054                       | 279 |

REGIONAL

AP886

MS668



The RoadX AP886 is an all-position tire designed only fit for tractor and trailer.

TIRE FEATURES:

- Specialized groove design improves directional stability and skid resistance for various applications.
- Tread design and groove nodules reduce stone retention.
- Shoulder grooves improve heat dissipation.
- Fine tread grooves improve driving safety on wet roads.



|    | Size     | Standard Rim(inch) | PR | Load |      |      |      | Pressure |     |     |     | Load Index |     | Tread Depth (mm) | Speed Grade | Inflated Tire Dimenton(mm) |     |
|----|----------|--------------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|----------------------------|-----|
|    |          |                    |    | Kg   |      | Lbs  |      | Kpa      |     | Psi |     |            |     |                  |             | D                          | B   |
|    |          |                    |    | S    | D    | S    | D    | S        | D   | S   | D   | S          | D   |                  |             |                            |     |
| CN | 11.00R20 | 8                  | 16 | 3350 | 3075 | 7390 | 6780 | 830      | 830 | 120 | 120 | 150        | 147 | 15.7             | K           | 1085                       | 293 |
| CN | 11.00R20 | 8                  | 18 | 3550 | 3250 | 7830 | 7160 | 930      | 930 | 135 | 135 | 152        | 149 | 15.7             | K           | 1085                       | 293 |
| CN | 11.00R20 | 8                  | 20 | 3550 | 3250 | 7830 | 7160 | 930      | 930 | 135 | 135 | 152        | 149 | 15.7             | K           | 1085                       | 293 |
| CN | 12.00R20 | 8.5                | 20 | 4000 | 3650 | 8820 | 8050 | 900      | 900 | 130 | 130 | 156        | 153 | 15.5             | K           | 1125                       | 315 |
| CN | 12.00R20 | 8.5                | 22 | 4000 | 3650 | 8820 | 8050 | 900      | 900 | 130 | 130 | 156        | 153 | 15.5             | K           | 1125                       | 315 |



The RoadX MS668 is a drive position tire designed only fit for tractor and trailer.

TIRE FEATURES:

- Groove designs on the pattern blocks reduce hardness and increase wet grip.
- The deepened groove design extending from the shoulder to the center provides excellent traction.
- Ribs connect shoulder blocks to improve tear resistance and promote even wear.
- Shallow groove design on the side of the blocks effectively promote even wear.
- The wide running surface and deepened pattern effectively increase wear resistance of the tread and improve mileage.



|    | Size     | Standard Rim(inch) | PR | Load |      |      |      | Pressure |     |     |     | Load Index |     | Tread Depth (mm) | Speed Grade | Inflated Tire Dimension(mm) |     |
|----|----------|--------------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|-----------------------------|-----|
|    |          |                    |    | Kg   |      | Lbs  |      | Kpa      |     | Psi |     |            |     |                  |             | D                           | B   |
|    |          |                    |    | S    | D    | S    | D    | S        | D   | S   | D   | S          | D   |                  |             |                             |     |
| CN | 11.00R20 | 8.0                | 18 | 3550 | 3250 | 7830 | 7160 | 930      | 930 | 135 | 135 | 152        | 149 | 19.5             | K           | 1085                        | 293 |
| CN | 12.00R20 | 8.5                | 18 | 3750 | 3450 | 8270 | 7610 | 830      | 830 | 120 | 120 | 154        | 151 | 20               | K           | 1125                        | 315 |
| CN | 12.00R20 | 8.5                | 22 | 4250 | 3875 | 9370 | 8540 | 970      | 970 | 140 | 140 | 158        | 155 | 20               | J           | 1125                        | 315 |

REGIONAL

MS678

MS688



The RoadX MS678 is a drive position tire designed only fit for tractor and trailer.

TIRE FEATURES:

- Widened running surface and tread groove design improve traction and grip.
- Deepened grooves improve driving safety.
- Groove nodules effectively reduce stone retention.
- Strengthened structure design improves load bearing capacity.
- Open shoulder design and rubber compound effectively dissipate heat.



|    | Size     | Standard Rim(inch) | PR | Load |      |      |      | Pressure |     |     |     | Load Index |     | Tread Depth (mm) | Speed Grade | Inflated Tire Dimension(mm) |     |
|----|----------|--------------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|-----------------------------|-----|
|    |          |                    |    | Kg   |      | Lbs  |      | Kpa      |     | Psi |     |            |     |                  |             |                             |     |
|    |          |                    |    | S    | D    | S    | D    | S        | D   | S   | D   | S          | D   |                  |             |                             |     |
| CN | 12.00R20 | 8.5                | 20 | 4000 | 3650 | 8820 | 8050 | 900      | 900 | 130 | 130 | 156        | 153 | 21               | J           | 1125                        | 315 |
| CN | 12.00R20 | 8.5                | 22 | 4000 | 3650 | 8820 | 8050 | 900      | 900 | 130 | 130 | 156        | 153 | 21               | J           | 1125                        | 315 |



The RoadX MS688 is a drive position tire designed only fit for tractor and trailer.

TIRE FEATURES:

- Tread groove and sipe design offer exceptional wet skid resistance.
- Large central tread blocks effectively improve impact resistance.
- Grooves design improves heat dissipation and reduces stone retention.
- Strengthened structure design improves load bearing capacity.



|    | Size     | Standard Rim | PR | Load |      |      |      | Pressure |     |     |     | Load Index |     | TreadDepth (mm) | Speed Grade | Inflated Tire Dimentation (mm) |     |
|----|----------|--------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|-----------------|-------------|--------------------------------|-----|
|    |          |              |    | Kg   |      | lbs  |      | Kpa      |     | Psi |     |            |     |                 |             |                                |     |
|    |          |              |    | S    | D    | S    | D    | S        | D   | S   | D   | S          | D   |                 |             |                                |     |
| CN | 11.00R20 | 8            | 18 | 3550 | 3250 | 7830 | 7160 | 930      | 930 | 135 | 135 | 152        | 149 | 18              | K           | 1085                           | 293 |
| CN | 11.00R20 | 8            | 20 | 3550 | 3250 | 7830 | 7160 | 930      | 930 | 135 | 135 | 152        | 149 | 18              | K           | 1085                           | 293 |
| CN | 12.00R20 | 8.5          | 20 | 4000 | 3650 | 8820 | 8050 | 900      | 900 | 130 | 130 | 156        | 143 | 18              | K           | 1125                           | 315 |
| CN | 12.00R20 | 8.5          | 22 | 4000 | 3650 | 8820 | 8050 | 900      | 900 | 130 | 130 | 156        | 143 | 18              | K           | 1125                           | 315 |
| CN | 12R22.5  | 9.00         | 18 | 3550 | 3250 | 7830 | 7160 | 930      | 930 | 135 | 135 | 152        | 149 | 18              | K           | 1085                           | 300 |
| CN | 12R22.5  | 9.00         | 20 | 3550 | 3250 | 7830 | 7160 | 930      | 930 | 135 | 135 | 152        | 149 | 18              | K           | 1085                           | 300 |

REGIONAL

DT992



The RoadX DT992 is a drive position tire designed only fit for tractor and trailer.

TIRE FEATURES:

- Small block grooves reduce block hardness and increase grip on wet road surfaces.
- Main groove designs improve overall grip.
- Shoulder blocks are connected to ribs that help improve tear resistance and promote even wear.
- Wide running surface and deep tread effectively increase tread wear resistance and tire mileage.



|       | Size     | Standard Rim(inch) | PR | Load |      |      |      | Pressure |     |     |     | Load Index |     | Tread Depth (mm) | Speed Grade | Inflated Tire Dimension(mm) |     |
|-------|----------|--------------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|-----------------------------|-----|
|       |          |                    |    | Kg   |      | Lbs  |      | Kpa      |     | Psi |     |            |     |                  |             |                             |     |
|       |          |                    |    | S    | D    | S    | D    | S        | D   | S   | D   | S          | D   |                  |             |                             |     |
| CN/VN | 11.00R20 | 8.0                | 18 | 3550 | 3250 | 7830 | 7160 | 930      | 930 | 135 | 135 | 152        | 149 | 20               | K           | 1085                        | 293 |
| VN    | 12.00R20 | 8.5                | 18 | 3750 | 3450 | 8270 | 7610 | 830      | 830 | 120 | 120 | 154        | 151 | 20               | K           | 1125                        | 315 |

REGIONAL

DT980

DT989



The RoadX DT980 is a drive position tire designed only fit for tractor and trailer.

TIRE FEATURES:

- Large tread blocks effectively improve puncture and cut resistance.
- Central tread grooves help to effectively improve impact resistance, traction, and braking.
- Step-like grooves and groove nodules improve puncture resistance.
- Enhanced tire structure increases load bearing capabilities.
- Tread compound effectively reduces heat buildup to extend tread life.



|    | Size     | Standard Rim(inch) | PR | Load |      |      |      | Pressure |     |     |     | Load Index |     | Tread Depth (mm) | Speed Grade | Inflated Tire Dimension(mm) |     |
|----|----------|--------------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|-----------------------------|-----|
|    |          |                    |    | Kg   |      | Lbs  |      | Kpa      |     | Psi |     |            |     |                  |             |                             |     |
|    |          |                    |    | S    | D    | S    | D    | S        | D   | S   | D   | S          | D   |                  |             |                             |     |
| CN | 12.00R20 | 8.5                | 20 | 4000 | 3650 | 8820 | 8050 | 900      | 900 | 130 | 130 | 156        | 153 | 25               | F           | 1125                        | 315 |
| CN | 12.00R20 | 8.5                | 22 | 4000 | 3650 | 8820 | 8050 | 900      | 900 | 130 | 130 | 156        | 153 | 25               | F           | 1125                        | 315 |



The RoadX DT989 is a drive position tire designed only fit for tractor and trailer.

TIRE FEATURES:

- Large lug design effectively improves the tire's puncture, cut, and chunking resistance.
- The central, interconnected rib offers exceptional durability for severe service applications.
- Tread grooves feature "stone ejectors" that effectively reduce stone retention.



|    | Size     | Standard Rim(inch) | PR | Load |      |      |      | Pressure |     |     |     | Load Index |     | Tread Depth (mm) | Speed Grade | Inflated Tire Dimention(mm) |     |
|----|----------|--------------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|-----------------------------|-----|
|    |          |                    |    | Kg   |      | Lbs  |      | Kpa      |     | Psi |     |            |     |                  |             |                             |     |
|    |          |                    |    | S    | D    | S    | D    | S        | D   | S   | D   | S          | D   |                  |             | S                           | D   |
| CN | 11.00R20 | 8                  | 18 | 3550 | 3250 | 7830 | 7160 | 930      | 930 | 135 | 135 | 152        | 149 | 23               | F           | 1085                        | 293 |
| CN | 11.00R20 | 8                  | 20 | 3550 | 3250 | 7830 | 7160 | 930      | 930 | 135 | 135 | 152        | 149 | 23               | F           | 1085                        | 293 |
| CN | 12.00R20 | 8.5                | 20 | 4000 | 3650 | 8820 | 8050 | 900      | 900 | 130 | 130 | 156        | 153 | 23.5             | F           | 1125                        | 315 |
| CN | 12.00R20 | 8.5                | 22 | 4000 | 3650 | 8820 | 8050 | 900      | 900 | 130 | 130 | 156        | 153 | 23.5             | F           | 1125                        | 315 |

REGIONAL

DT982



The RoadX DT982 is a drive position tire designed only fit for tractor and trailer.

TIRE FEATURES:

- Large tread blocks effectively improve puncture and cut resistance.
- Central tread grooves help to effectively improve impact resistance, traction, and braking.
- Step-like grooves and groove nodules improve puncture resistance.
- Enhanced tire structure increases load bearing capabilities.
- Tread compound effectively reduces heat buildup to extend tread life.



|    | Size     | Standard Rim (inch) | PR | Load |      |      |      | Pressure |     |     |     | Load Index |     | Tread Depth (mm) | Speed Grade | Inflated Tire Dimention (mm) |     |
|----|----------|---------------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|------------------------------|-----|
|    |          |                     |    | Kg   |      | Lbs  |      | Kpa      |     | Psi |     |            |     |                  |             |                              |     |
|    |          |                     |    | S    | D    | S    | D    | S        | D   | S   | D   | S          | D   |                  |             | S                            | D   |
| CN | 11.00R20 | 8.0                 | 18 | 3550 | 3250 | 7830 | 7160 | 930      | 930 | 135 | 135 | 152        | 149 | 24               | F           | 1096                         | 293 |
| CN | 11.00R20 | 8.0                 | 20 | 3550 | 3250 | 7830 | 7160 | 930      | 930 | 135 | 135 | 152        | 149 | 24               | F           | 1096                         | 293 |

REGIONAL

DT997


DT999



The RoadX DT997 is a drive position tire designed only fit for tractor and trailer.

TIRE FEATURES:

- Large tread blocks and deepend grooves improve off-road traction and braking performance.
- Open shoulder design improves self-cleaning capabilities.
- Central conncting rib increases block rigidity and improves tear resistance.

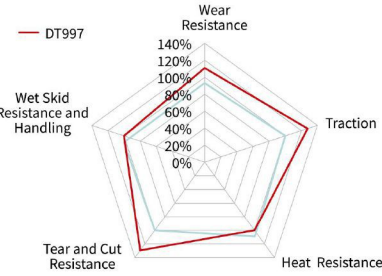

|       | Size     | Standard Rim(inch) | PR | Load |      |      |      | Pressure |     |     |     | Load Index |     | Tread Depth (mm) | Speed Grade | Inflated Tire Dimension(mm) |     |
|-------|----------|--------------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|-----------------------------|-----|
|       |          |                    |    | Kg   |      | Lbs  |      | Kpa      |     | Psi |     |            |     |                  |             |                             |     |
|       |          |                    |    | S    | D    | S    | D    | S        | D   | S   | D   | S          | D   |                  |             |                             |     |
| CN    | 11.00R20 | 8.0                | 18 | 3550 | 3250 | 7830 | 7160 | 930      | 930 | 135 | 135 | 152        | 149 | 23.5             | F           | 1085                        | 293 |
| CN/VN | 12.00R20 | 8.5                | 18 | 3750 | 3450 | 8270 | 7610 | 830      | 830 | 120 | 120 | 154        | 151 | 23.5             | F           | 1125                        | 315 |
| CN    | 12.00R20 | 8.5                | 22 | 4250 | 3875 | 9370 | 8540 | 970      | 970 | 140 | 140 | 158        | 155 | 23.5             | F           | 1136                        | 315 |



The RoadX DT999 is a drive position tire designed only fit for tractor and trailer.

TIRE FEATURES:

- Open shoulder design improves grip and traction in off-road applications.
- Ribs between the tread block pattern effectively improve durability and tear resistance.



|       | Size    | Standard Rim(inch) | PR | Load |      |      |      | Pressure |     |     |     | Load Index |     | Tread Depth (mm) | Speed Grade | Inflated Tire Dimention(mm) |     |
|-------|---------|--------------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|-----------------------------|-----|
|       |         |                    |    | Kg   |      | Lbs  |      | Kpa      |     | Psi |     |            |     |                  |             | D                           | B   |
|       |         |                    |    | S    | D    | S    | D    | S        | D   | S   | D   | S          | D   |                  |             |                             |     |
| CN/VN | 12R22.5 | 9                  | 18 | 3550 | 3250 | 7830 | 7160 | 930      | 930 | 135 | 135 | 152        | 149 | 24               | G           | 1085                        | 300 |

REGIONAL


RU651



The RoadX RU651 is an all-position tire designed only fit for tractor and trailer.

TIRE FEATURES:

- Sidewall protector improves kerbing resistance.
- Sipe design effectively increaes ground contact area for improved grip and skid-resistance.
- Shoulder groove design improves heat dissipation.
- Optimized tread pattern design effectively reduces noise emissions.
- Deepend tread groove improves service life.

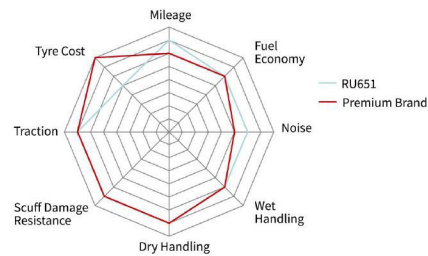

|    | Size    | Standard Rim(inch) | PR | Load |      |      |      | Pressure |     |     |     | Load Index |     | Tread Depth (mm) | Speed Grade | Inflated Tire Dimenton(mm) |     |
|----|---------|--------------------|----|------|------|------|------|----------|-----|-----|-----|------------|-----|------------------|-------------|----------------------------|-----|
|    |         |                    |    | Kg   |      | Lbs  |      | Kpa      |     | Psi |     |            |     |                  |             |                            |     |
|    |         |                    |    | S    | D    | S    | D    | S        | D   | S   | D   | S          | D   |                  |             | S                          | D   |
| CN | 11R22.5 | 8.25               | 16 | 3150 | 2900 | 6940 | 6395 | 850      | 850 | 123 | 123 | 148        | 145 | 20               | J           | 1065                       | 279 |